




COMPACT EXCAVATOR SALES LLC



ELECTRIC EXCAVATOR



17VXE Electric Excavator 3 Phase/480 Volt



- ⚡ Hydraulic Controlled
- ⚡ Retracted is 39" total unit width
- ⚡ Expanded is 50" total unit width



- ⚡ 15 h.p./3phase/48 volt/ 50 amp Reuland Motor
- ⚡ Key start
- ⚡ E-Stop
- ⚡ Soft start protected
- ⚡ Reverse rotation protected
- ⚡ Low voltage protected
- ⚡ Low amperes protected
- ⚡ Over current protected
- ⚡ Ground fault protected



Standard Items:

- 18" Bucket
- Auxillary Piping 1
- Additional Counter Weight2
- Control Pattern Change Valve

Options:

- Buckets Sizes 8" 12" 24"
- 39" Ditch Clean Bucket
- 39" Swivel
- Blade Extensions 3
- Hydraulic Thumb
- Quick Coupler







ELECTRIC EXCAVATOR



Dimensions

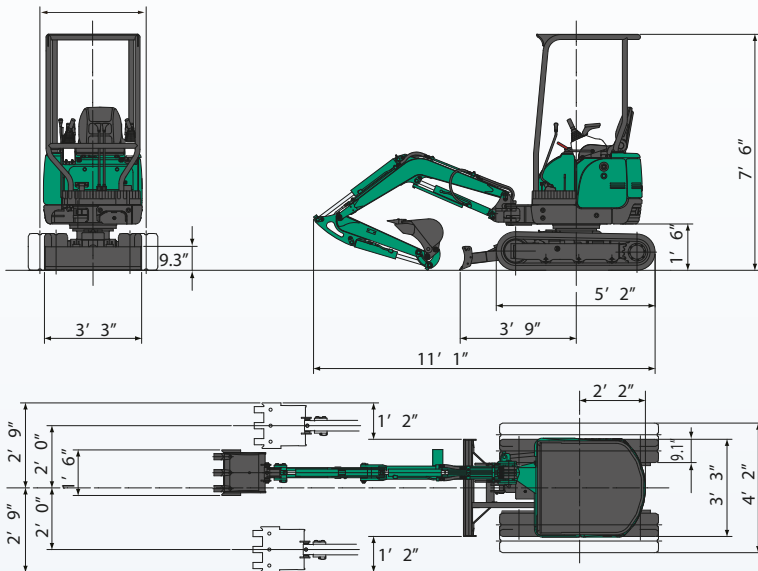

Working Range

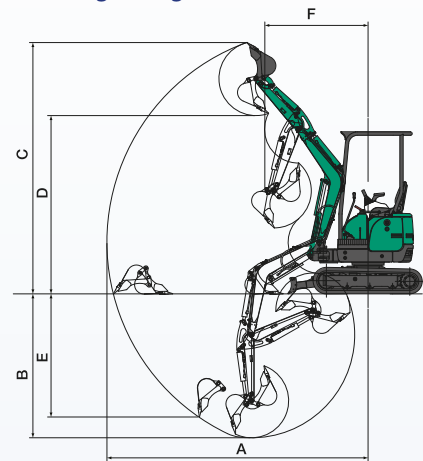

	4-Post Canopy
A Max. digging radius	12'4"
B Max. digging depth	7'0"
C Max. digging height	11'10"
D Max. dumping height	8'5"
E Max. vertical digging depth	5'10"
F Min. front turning radius	4'11"
At right boom swing	4'2"

17VXE Specifications

Performance		Bo om swing system	
Bucket capacity	1.6 cu. ft.	Type	Boom o fset with hydraulic cylinder
Bucket width	18"	Swing angle (L/R)	55°/80°
Operating weight: 4-Post	3,583 lbs.	Hydraulic system	
Transportation weight: 4-Post	3,417 lbs.	Pressure	3000 psi
Swing speed	9.5 min ⁻¹	Pum p • type/hydraulic flow	2 Piston/2 Gear • 4.5 gal/min x 2 + 3.2 gal/min
Travel speed (low/high)	1.3/2.5 mph	Dozer blade	
Gradeability	30°	Size	37.8" x 9.3"
Ground pressure	3.8 psi	Lift above ground / Drop below ground	10.8"/12"
Max bucket digging force	5,447 lbs.	Max auxiliary flow	
Motor	Rueland 15 H.P. 3PH. 480V	Auxiliary line	7.7 gal/min

abletool.net

ABLE
TOOL and EQUIPMENT

CONNECTICUT

410 Burnham St., South Windsor, CT 06074

Phone: 860-289-2020

MASSACHUSETTS

120 Interstate Dr, West Springfield, MA 01089

Phone: 413-363-0780